

Part Number	CBB66A-660V256		Revision	
Customer P/N			Revision	
Capacitance	25	uF.	Tolerance	5.0%
Voltage	660	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	.250" Quad-Spade Quick Connect Terminals			
Operating Temperature	-25 °C.-	100 °C.		
Dissipation Factor	0.002	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive


Wood Dale, Illinois 60191

773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Case / Cover Width (W)	3.54	0.06
Case / Cover Thickness (T)	1.89	0.06
Case Height (H)	4.72	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.83	ref.
Insulating Cup (dia.)	0.74	ref.
<i>Dimensions in inches</i>		

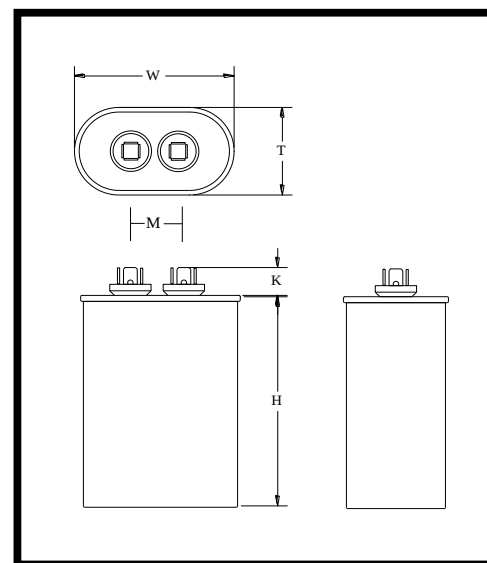

Stamping

AHJK - Motor Cap
CBB66A-660V256
25 uF +/-5% 660VAC
100° C Max. 50/60Hz.
Protected 10,000 AFC
Internal Resistor
Non PCB Date Code RoHS

Lighting Capacitor

With Internal Discharge Resistor

Approval: _____

Date _____

J.D. Aldana

September 4, 2018