

Part Number	CD60B-2EJ243292R-T1M1		Revision
Customer P/N	18-1901-71	1053AC	Revision
Capacitance	243	to	293 uF.
Voltage	250		VAC
Dielectric	Aluminum Electrolytic		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	to	65 °C.
Dissipation Factor	0.1		max. @ 60 Hz.

	Dimension	Tolerance
Diameter (D)	2.062	0.03
Terminal Spacing (C)		
Height (L)	4.38	0.06
Quick-Connect Terminal	double	F
<i>Dimensions in inches</i>		

Stamping

Motor Capacitors
CD60B-2EJ243292R-T1M1
243-293 uF. 250 VAC

Motor Starting Capacitor
-25 ~ +65 C.

RU (datecode) RoHS
18-1901-71

 **RU**[®] **US**

Type 2 - Standard Duty - 15K Ohm, 2 watt resistor attached
Capacitor must be labeled with customer's P/N Bar Code

MOTOR

Capacitors, Inc.

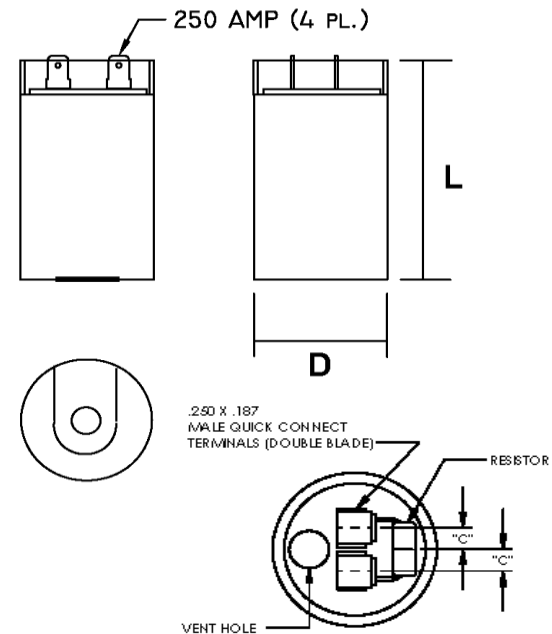
Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191

773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com

info@capacitorindustries.com

Approval: J.D. Aldana
Date: **September 23, 2024**